


NBS-2682

2-section anodised aluminium telescopic mast

68mm O.D. base

1.82 metres - Packed

3.4 metres - Extended

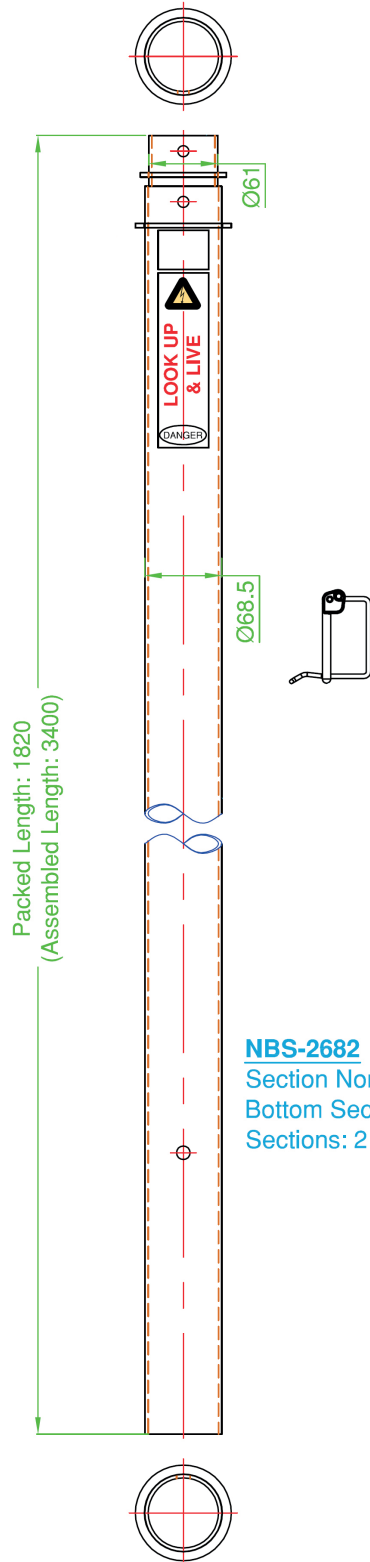

Specifications

| | |
|-------------------------|---|
| Construction | Clear anodised aluminium telescopic sections with section stop guides and 1 x passivated D-locking clip |
| Number of Sections | 2 |
| Retracted Height | 1.82 metres / 5.97 ft |
| Extended Height | 3.40 metres / 11.15 ft |
| Weight - excl. D-clips | 5.0 kg / 11.02 lbs |
| Wind Load rating - Max. | 160 kph / 99mph - with each section guy wire supported |
| Top section load rating | 6.0 kg / 13.23 lbs |
| Max. surface area | 0.2m ² |
| Base Section Dimension | O.D: 68mm / 2.67" |
| 2nd Section Dimensions | O.D: 61mm / 2.40" |
| Supplied Accessories | 1 x gold passivated section D-clips |

Required Accessories - order quantity separately to suit 3/4 configuration

| | |
|---|---|
| Guy Wire - High strength nylon <i>Single units, order by quantity required either 3 or 4 at each section For stainless steel see NBS-GW series</i> | NBS-GR10 - 10 metre guy wire for both section |
| Anodised Aluminium Guy Rings - free rotating <i>single unit required - per mast</i> | NBS-AGR62 - Suits 61mm O.D. top section NBS-AGR69 - Suits 68mm O.D. bottom section |

Optional Accessories - order separately to suit configuration

| | |
|--------------------------|---|
| Mount Bases | NBS-68WStand - drive-on/underwheel static stand NBS-68TWStand - drive-on/underwheel tilt stand NBS-68TBMount - tow-bar socket mount NBS-BS68 - static flat roof/ground stand |
| Antenna/Equipment mounts | NBS-MT55 - 1.5m top accessory mount tube 55mm O.D., includes 'D' locking clip |
| Turnbuckles | NBS-9640-2 8mm 316 stainless steel (toggle & toggle) turnbuckle |