


NBS-2683

3-section anodised aluminium telescopic mast

68mm O.D. base

1.865 metres - Packed

5.08 metres - Extended

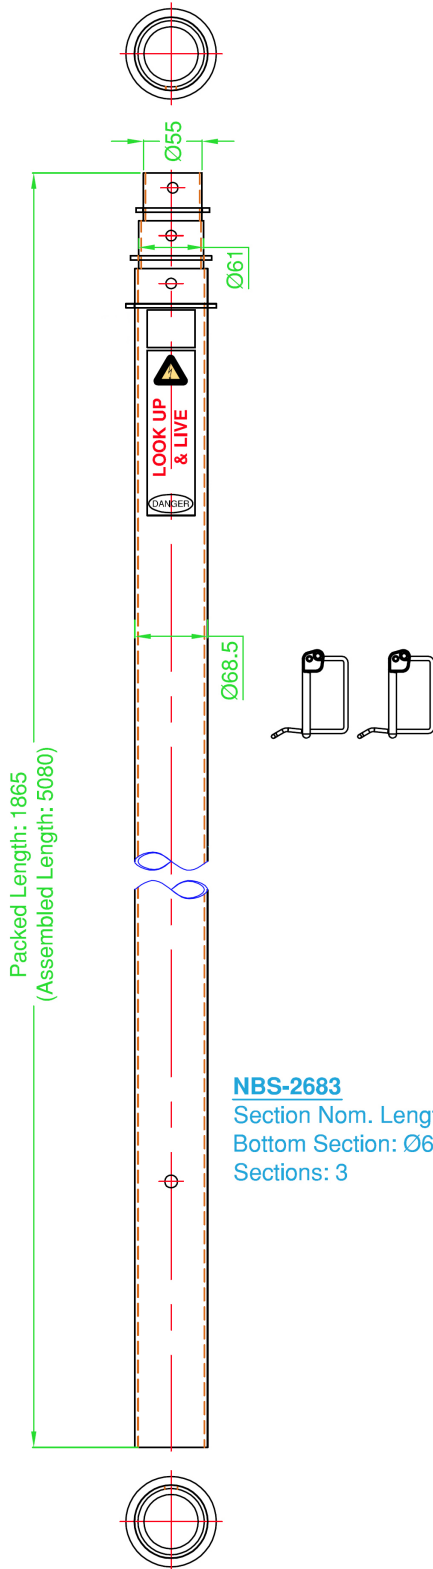

NBS-2683
Section Nom. Length: 2 mtr
Bottom Section: Ø68
Sections: 3

Specifications

Construction	Clear anodised aluminium telescopic sections with section stop guides and 2 x passivated D-locking clip
Number of Sections	3
Retracted Height	1.865 metres / 6.12 ft
Extended Height	5.08 metres / 16.67 ft
Weight - excl. D-clips	7.0 kg / 15.43 lbs
Wind Load rating - Max.	160 kph / 99mph - with each section guy wire supported
Top section load rating	12.0 kg / 26.46 lbs
Max. surface area	0.2m ²
Base Section Dimension	O.D: 68mm / 2.67"
2nd Section Dimensions	O.D: 61mm / 2.40"
3rd Section Dimensions	O.D: 55mm / 2.16"
Supplied Accessories	2 x gold passivated section D-clips

Required Accessories - order quantity separately to suit 3/4 configuration

Guy Wire - High strength nylon <i>Single units, order by quantity required either 3 or 4 at each section For stainless steel see NBS-GW series</i>	NBS-GR10 - 10 metre guy wire for all sections
Anodised Aluminium Guy Rings - free rotating <i>single unit required - per mast</i>	NBS-AGR69 - Suits 68mm O.D. base section NBS-AGR62 - Suits 61mm O.D. 2nd section NBS-AGR56 - Suits 55mm O.D. 3rd section

Optional Accessories - order separately to suit configuration

Mount Bases	NBS-68WStand - drive-on/underwheel static stand NBS-68TWStand - drive-on/underwheel tilt stand NBS-68TBMount - tow-bar socket mount NBS-BS68 - static flat roof/ground stand
Antenna/Equipment mounts	1.3m top accessory mount tube 50mm O.D., includes 'D' locking clip - <u>Enquire Directly for SKU</u>