



NBS-3503

3-section anodised aluminium telescopic mast

50mm O.D. base

3.0 metres - Packed

8.34 metres - Extended

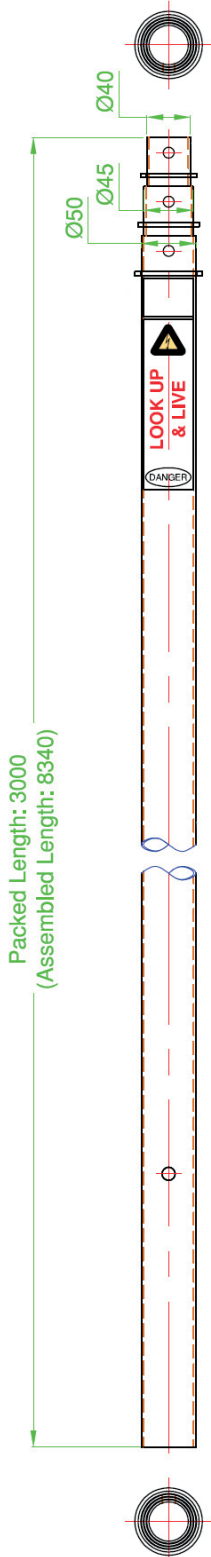

NBS-3503
Section Nom. Length: 3 mtr
Bottom Section: Ø50
Sections: 3

Specifications

Construction	Clear anodised aluminium telescopic sections with section stop guides and 2 x passivated D-locking clip
Number of Sections	3
Retracted Height	3.0 metres / 9.84 ft
Extended Height	8.34 metres / 27.36 ft
Weight - excl. D-clips	6.0 kg / 13.23 lbs
Wind Load rating - Max.	160 kph / 99mph - with each section guy wire supported
Top section load rating	3.0 kg / 6.61 lbs
Max. surface area	0.2m ²
Base Section Dimension	O.D: 50mm / 1.96"
2nd Section Dimensions	O.D: 45mm / 1.77"
3rd Section Dimensions	O.D: 40mm / 1.57"
Supplied Accessories	2 x gold passivated section D-clips

Required Accessories - order quantity separately to suit 3/4 configuration

Guy Wire - High strength nylon <i>Single units, order by quantity required either 3 or 4 at each section For stainless steel see NBS-GW series</i>	NBS-GR5 - 5 metre guy wire for base section NBS-GR10 - 10 metre guy wire for middle section NBS-GR15 - 15 metre guy wire for top section
Anodised Aluminium Guy Rings - free rotating <i>single unit required - per mast</i>	NBS-AGR51 - Suits 50mm O.D. bottom section NBS-AGR46 - Suits 45mm O.D. top section NBS-AGR41 - Suits 40mm O.D. top section

Optional Accessories - order separately to suit configuration

Mount Bases	NBS-50WStand - drive-on/underwheel static stand NBS-50TWStand - drive-on/underwheel tilt stand NBS-50TBMount - tow-bar socket mount NBS-BS50 - static flat roof/ground stand
Antenna/Equipment mounts	NBS-MT35 - 1.5m top accessory mount tube 35.5mm O.D., includes 'D' locking clip
Turnbuckles	NBS-9640-2 8mm 316 stainless steel (toggle & toggle) turnbuckle