


# NBS-3553

3-section anodised aluminium telescopic mast

55mm O.D. base

2.995 metres - Packed

8.2 metres - Extended

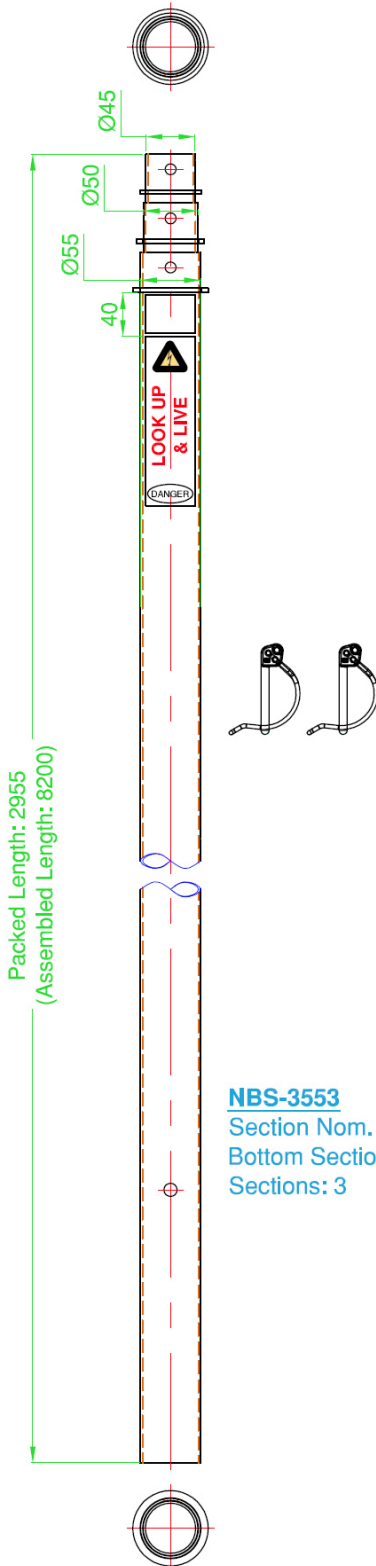

**NBS-3553**  
Section Nom. Length: 3 mtr  
Bottom Section: Ø55  
Sections: 3

### Specifications

Construction	Clear anodised aluminium telescopic sections with section stop guides and 2 x passivated D-locking clip
Number of Sections	3
Retracted Height	2.995 metres / 9.69 ft
Extended Height	8.2 metres / 26.90 ft
Weight - excl. D-clips	6.0 kg / 13.23 lbs
Wind Load rating - Max.	160 kph / 99mph - with each section guy wire supported
Top section load rating	4.0 kg / 8.82 lbs
Max. surface area	0.2m <sup>2</sup>
Base Section Dimension	O.D: 55mm / 2.16"
2nd Section Dimensions	O.D: 50mm / 1.96"
3rd Section Dimensions	O.D: 45mm / 1.77"
Supplied Accessories	2 x gold passivated section D-clips

### Required Accessories - order quantity separately to suit 3/4 configuration

Guy Wire - High strength nylon <i>Single units, order by quantity required either 3 or 4 at each section For stainless steel see NBS-GW series</i>	NBS-GR5 - 5 metre guy wire for base section NBS-GR10 - 10 metre guy wire for middle section NBS-GR15 - 15 metre guy wire for top section
Anodised Aluminium Guy Rings - free rotating <i>single unit required - per mast</i>	NBS-AGR56 - Suits 55mm O.D. bottom section NBS-AGR51 - Suits 50mm O.D. 2nd section NBS-AGR46 - Suits 45mm O.D. 3rd section

### Optional Accessories - order separately to suit configuration

Mount Bases	NBS-55WStand - drive-on/underwheel static stand NBS-55TWStand - drive-on/underwheel tilt stand NBS-55TBMount - tow-bar socket mount NBS-BS55 - static flat roof/ground stand
Antenna/Equipment mounts	1.3m top accessory mount tube 45mm O.D., includes 'D' locking clip - <u>Enquire Directly for SKU</u>

# NBS-3553

3-section anodised aluminium telescopic mast

55mm O.D. base

2.995 metres - Packed

8.2 metres - Extended



### Suitable base mount accessories - order separately



#### **SKU: NBS-55WStand**

Galvanised steel 'drive-on' under wheel mount base  
2 x securing bolts


*Can be supplied in custom powdercoated colours on special request, please note additional cost will be incurred.*



#### **SKU: NBS-55TStand**

Galvanised steel and aluminium 'drive-on' underwheel tilt-over mount base for 55mm O.D. telescopic masts  
90 degree tilt action

*Can be supplied in custom powdercoated colours on special request, please note additional cost will be incurred.*



#### **SKU: NBS-55TBMount**

Galvanised steel vehicle tow ball socket mount with locking pin and securing bolt

*Can be supplied in custom powdercoated colours on special request, please note additional cost will be incurred.*



#### **SKU: NBS-BS55**

Anodised aluminium flat ground/roof mount base  
4 x 10.25mm mount holes

*Can be supplied in custom powdercoated colours on special request, please note additional cost will be incurred.*



#### **SKU: NBS-GW\*\* Series**

304 stainless steel multi-strand guy wire rope kits with quick-install carabiner and thimble. 2 x cable clamps and thimble supplied for at-ground securing

*Available in 5 metre / 10 metre / 15 metre / 20 metre & 25 metre lengths as standard. On special request, alternate/custom lengths can be manufactured, please note additional cost will be incurred.*



#### **SKU: NBS-GR\*\* Series**

8PLT 4mm army green polyester guy rope with fixed carabiner one end and 2 x cable clamps and thimble supplied for at-ground securing

*Available in 5 metre / 10 metre / 15 metre / 20 metre & 25 metre lengths as standard. On special request, alternate/custom lengths can be manufactured, please note additional cost will be incurred.*