


# NBS-3554

4-section anodised aluminium telescopic mast

55mm O.D. base 3.0 metres - retracted 10.9 metres - extended

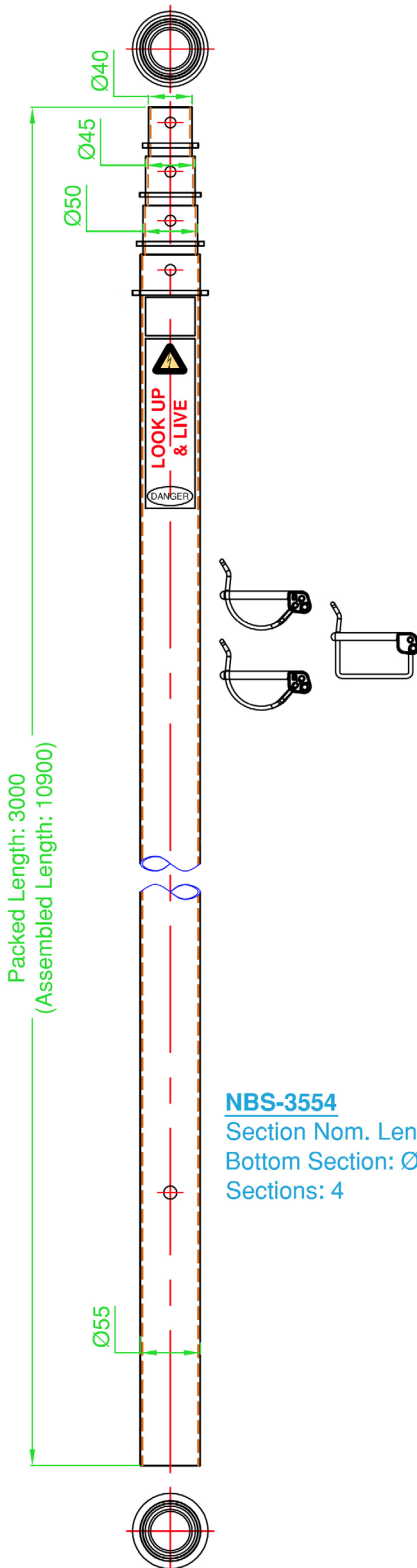

### NBS-3554

Section Nom. Length: 3 mtr

Bottom Section: Ø55

Sections: 4

### Specifications

Construction	Anodised aluminium telescopic sections with section stop guides and passivated 'D' locking clips
Number of Sections	4
Retracted Height	3.0 metres / 9.84 ft
Extended Height	10.9 metres / 35.76 ft
Weight - excl D-clips	8.0 kg / 17.64 lbs
Wind Load rating - Max.	160 kph / 99mph - with each section guy wire supported
Top section load rating	4.0kg / 8.82 lbs
Max. surface area	0.2m <sup>2</sup>
Base Section Dimension	O.D: 55mm / 2.16"
2nd Section Dimension	O.D: 50mm / 1.97"
3rd Section Dimension	O.D: 45mm / 1.77"
Top Section Dimension	O.D: 40mm / 1.57"
Supplied Accessories	3 x 'D' locking clip for extended section locking

### Required Accessories - order quantity separately to suit 3/4 configuration

Guy Wire - High strength nylon <i>Single units, order by quantity required either 3 or 4, set at every 2nd section For stainless steel see NBS-GW series</i>	NBS-GR5 - 5 metre guy wire for base section
	NBS-GR10 - 10 metre guy wire for middle section
	NBS-GR15 - 15 metre guy wire for 2 top sections
Anodised Aluminium Guy Rings - free rotating <i>single unit required - per mast</i>	NBS-AGR56 - Suits 55mm O.D. bottom section NBS-AGR51 - Suits 50mm O.D. 2nd bottom section NBS-AGR46 - Suits 45mm O.D. 2nd top section NBS-AGR41 - Suits 40mm O.D. top section

### Optional Accessories - order separately to suit configuration

Mount Bases	NBS-55WStand - drive-on/underwheel static stand NBS-55TStand - drive-on/underwheel tilt stand NBS-55TBMount - tow-bar socket mount NBS-BS55 - static flat roof/ground stand
Antenna/Equipment mounts	A-2871-2 - 1.3m top accessory mount tube 35.5mm O.D., includes 'D' locking clip