


NBS-3612

2-section anodised aluminium telescopic mast

61mm O.D. base

2.865 metres - Packed

5.42 metres - Extended

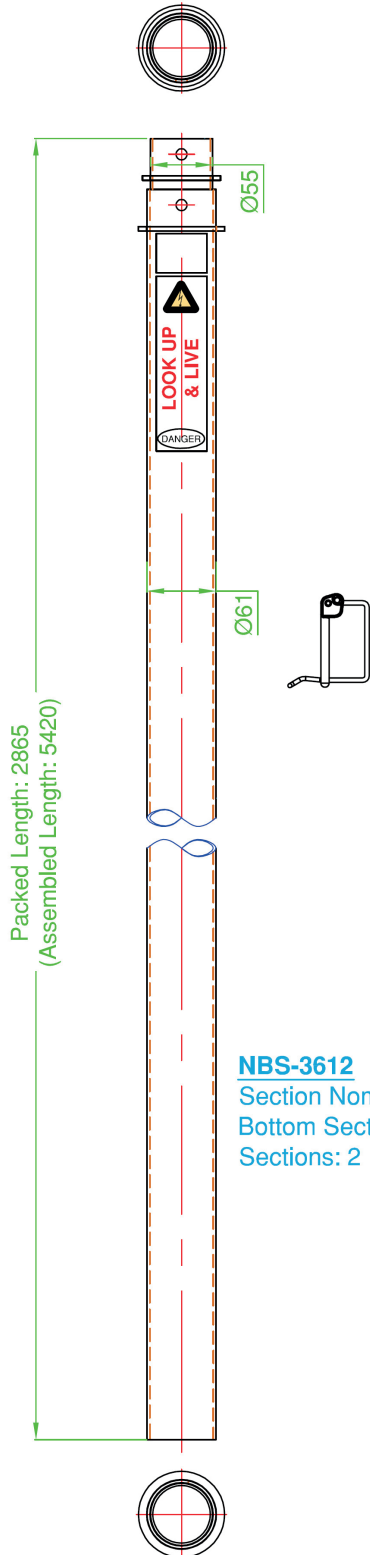

Specifications

Construction	Clear anodised aluminium telescopic sections with section stop guides and 1 x passivated D-locking clip
Number of Sections	2
Retracted Height	2.865 metres / 9.4 ft
Extended Height	5.42 metres / 17.78 ft
Weight - excl. D-clips	5.0 kg / 11.02 lbs
Wind Load rating - Max.	160 kph / 99mph - with each section guy wire supported
Top section load rating	4.5 kg / 9.92 lbs
Max. surface area	0.2m ²
Base Section Dimension	O.D: 61mm / 2.40"
2nd Section Dimensions	O.D: 55mm / 2.16"
Supplied Accessories	1 x gold passivated section D-clips

Required Accessories - order quantity separately to suit 3/4 configuration

Guy Wire - High strength nylon <i>Single units, order by quantity required either 3 or 4 at each section For stainless steel see NBS-GW series</i>	NBS-GR5 - 5 metre guy wire for base section NBS-GR10 - 10 metre guy wire for top section
Anodised Aluminium Guy Rings - free rotating <i>single unit required - per mast</i>	NBS-AGR62 - Suits 61mm O.D. bottom section NBS-AGR56 - Suits 55mm O.D. top section

Optional Accessories - order separately to suit configuration

Mount Bases	NBS-61WStand - drive-on/underwheel static stand NBS-61TWStand - drive-on/underwheel tilt stand NBS-61TBMount - tow-bar socket mount NBS-BS61 - static flat roof/ground stand
Antenna/Equipment mounts	NBS-MT50 - 1.5m top accessory mount tube 50mm O.D., includes 'D' locking clip
Turnbuckles	NBS-9640-2 8mm 316 stainless steel (toggle & toggle) turnbuckle