


NBS-3615

5-section anodised aluminium telescopic mast

61mm O.D. base

3.0 metres - Packed

13.5 metres - Extended

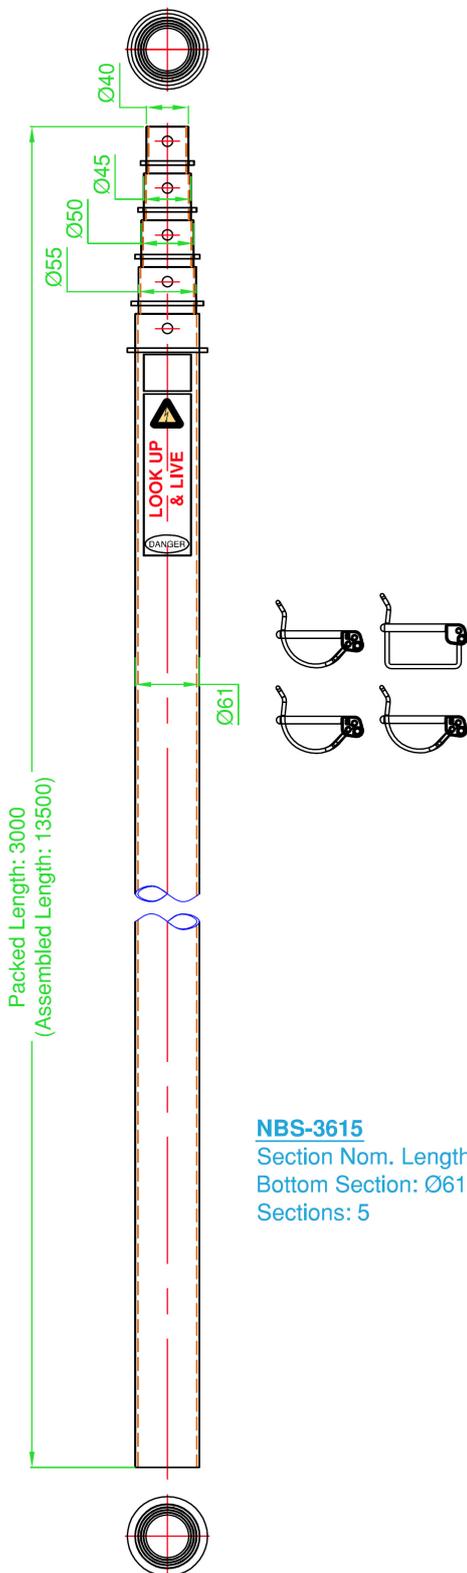

Specifications

Construction	Clear anodised aluminium telescopic sections with section stop guides and 4 x passivated D-locking clip
Number of Sections	5
Retracted Height	3.0 metres / 9.84 ft
Extended Height	13.5 metres / 44.29 ft
Weight - excl. D-clips	11.0 kg / 24.25 lbs
Wind Load rating - Max.	160 kph / 99mph - with each section guy wire supported
Top section load rating	6.0 kg / 13.23 lbs
Max. surface area	0.2m ²
Base Section Dimension	O.D: 61mm / 2.40"
2nd Section Dimensions	O.D: 55mm / 2.16"
3rd Section Dimensions	O.D: 50mm / 1.96"
4th Section Dimensions	O.D: 45mm / 1.77"
5th Section Dimensions	O.D: 40mm / 1.57"
Supplied Accessories	4 x gold passivated section D-clips

Required Accessories - order quantity separately to suit 3/4 configuration

Guy Wire - High strength nylon <i>Single units, order by quantity required either 3 or 4 at each section For stainless steel see NBS-GW series</i>	NBS-GR5 - 5 metre guy rope for base section NBS-GR10 - 10 metre guy rope for 2nd section NBS-GR15 - 15 metre guy rope for 3rd & 4th section NBS-GR20 - 20 metre guy rope for top section
Anodised Aluminium Guy Rings - free rotating <i>single unit required - per mast</i>	NBS-AGR62 - Suits 61mm O.D. bottom section NBS-AGR56 - Suits 55mm O.D. 2nd section NBS-AGR51 - Suits 50mm O.D. 3rd section NBS-AGR46 - Suits 45mm O.D. 4th section NBS-AGR41 - Suits 40mm O.D. 5th section

Optional Accessories - order separately to suit configuration

Mount Bases	NBS-61WStand - drive-on/underwheel static stand NBS-61TWStand - drive-on/underwheel tilt stand NBS-61TBMount - tow-bar socket mount NBS-BS61 - static flat roof/ground stand
Antenna/Equipment mounts	1.3m top accessory mount tube 50mm O.D., includes 'D' locking clip - <u>Enquire Directly</u> for SKU

NBS-3615

5-section anodised aluminium telescopic mast

61mm O.D. base

3.0 metres - Packed

13.5 metres - Extended



Suitable base mount accessories - order separately



SKU: NBS-61WStand

Galvanised steel 'drive-on' under wheel mount base
2 x securing bolts


Can be supplied in custom powdercoated colours on special request, please note additional cost will be incurred.



SKU: NBS-61TStand

Galvanised steel and aluminium 'drive-on' underwheel tilt-over mount base for 55mm O.D. telescopic masts
90 degree tilt action

Can be supplied in custom powdercoated colours on special request, please note additional cost will be incurred.



SKU: NBS-61TBMount

Galvanised steel vehicle tow ball socket mount with locking pin and securing bolt

Can be supplied in custom powdercoated colours on special request, please note additional cost will be incurred.



SKU: NBS-BS61

Anodised aluminium flat ground/roof mount base
4 x 10.25mm mount holes

Can be supplied in custom powdercoated colours on special request, please note additional cost will be incurred.



SKU: NBS-GW Series**

304 stainless steel multi-strand guy wire rope kits with quick-install carabiner and thimble. 2 x cable clamps and thimble supplied for at-ground securing

Available in 5 metre / 10 metre / 15 metre / 20 metre & 25 metre lengths as standard. On special request, alternate/custom lengths can be manufactured, please note additional cost will be incurred.



SKU: NBS-GR Series**

8PLT 4mm army green polyester guy rope with fixed carabiner one end and 2 x cable clamps and thimble supplied for at-ground securing

Available in 5 metre / 10 metre / 15 metre / 20 metre & 25 metre lengths as standard. On special request, alternate/custom lengths can be manufactured, please note additional cost will be incurred.