## **Section 2: Telescopic Mast**







# **NBS-3682**


2-section anodised aluminium telescopic mast

68mm O.D. base

2.82 metres - Packed

5.33 metres - Extended



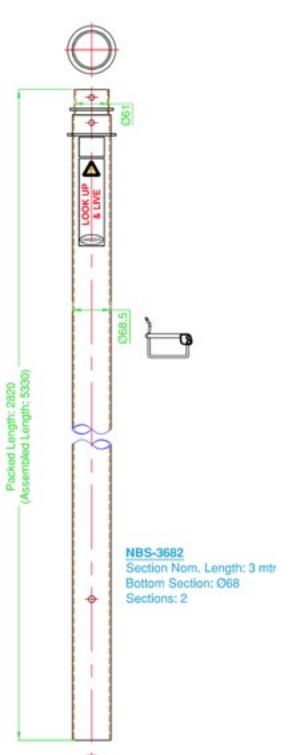

Specifications	
Construction	Clear anodised aluminium telescopic sections with section stop guides and 1 x passivated D-locking clip
Number of Sections	2
Retracted Height	2.82 metres / 9.25 ft
Extended Height	5.33 metres / 17.49 ft
Weight - excl. D-clips	8.0 kg / 17.64 lbs
Wind Load rating - Max.	160 kph / 99mph - with each section guy wire supported
Top section load rating	5.0 kg / 11.02 lbs
Max. surface area	0.2m²
Base Section Dimension	O.D: 68mm / 2.67"
2nd Section Dimensions	O.D: 61mm / 2.40"
Supplied Accessories	1 x gold passivated section D-clips

Required Accessories - order quantity separately to suit 3/4 configuration		
Guy Wire - High strength nylon Single units, order by quantity required either 3 or 4 at each section For stainless steel see NBS-GW series	NBS-GR5 - 5 metre guy wire for base section NBS-NGW10 - 10 metre guy wire for top section	
Anodised Aluminium Guy Rings - free rotating single unit required - per mast	NBS-AGR62 - Suits 61mm O.D. top section NBS-AGR69 - Suits 68.5mm O.D. bottom section	

	Optional Accessories - o	optional Accessories - order separately to suit configuration	
-	Mount Bases	NBS-68WStand - drive-on/underwheel static stand	
		NBS-68TWStand - drive-on/underwheel tilt stand	
		NBS-68TBMount - tow-bar socket mount	
		NBS-BS68 - static flat roof/ground stand	
	Base Extensions	NBS-4761-MK - 4 metre x 76mm O.D. base exten-	
		sion kit with guy ring and flat ground/flat roof mount	
		base	
	Antenna/Equirement mounts	1.3m top accessory mount tube 50mm O.D., includes 'D' locking clip - Enquire Directly for SKU	
		· · · · · · · · · · · · · · · · · · ·	

## **Section 2: Telescopic Mast**





### **NBS-3682**

2-section anodised aluminium telescopic mast

68mm O.D. base

2.82 metres - Packed

5.33 metres - Extended



### Suitable base mount accessories - order separately



#### SKU: NBS-68WStand

Galvanised steel 'drive-on' under wheel mount base 2 x securing bolts

Can be supplied in custom powdercoated colours on special request, please note additional cost will be incurred.



### SKU: NBS-68TStand

Galvanised steel and aluminium 'drive-on' underwheel tiltover mount base for 55mm O.D. telescopic masts 90 degree tilt action

Can be supplied in custom powdercoated colours on special request, please note additional cost will be incurred.



### SKU: NBS-68TBMount

Galvanised steel vehicle tow ball socket mount with locking pin and securing bolt\

Can be supplied in custom powdercoated colours on special request, please note additional cost will be incurred.



#### SKU: NBS-BS68

Anodised aluminium flat ground/roof mount base 4 x 10.25mm mount holes

Can be supplied in custom powdercoated colours on special request, please note additional cost will be incurred.



### SKU: NBS-GW\*\* Series

304 stainless steel multi-strand guy wire rope kits with quick-install carabiner and thimble. 2 x cable clamps and thimble supplied for at-ground securing

Available in 5 metre / 10 metre / 15 metre / 20 metre & 25 metre lengths as standard. On special request, alternate/custom lengths can be manufactured, please note additional cost will be incurred.



### SKU: NBS-GR\*\* Series

8PLT 4mm army green polyester guy rope with fixed carabiner one end and 2 x cable clamps and thimble supplied for at-ground securing

Available in 5 metre / 10 metre / 15 metre / 20 metre & 25 metre lengths as standard. On special request, alternate/custom lengths can be manufactured, please note additional cost will be incurred.