


NBS-TBMount Series

Galvanised steel Tow-ball socket mount base for telescopic masts or poles

Models for 45-68mm mast, for quick deployment and removal

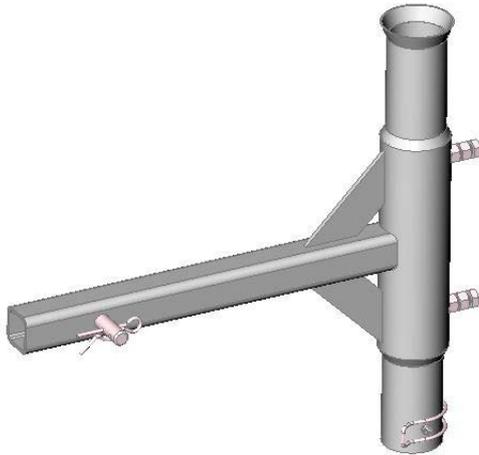

The NBS-TBMount series of quick-install tow ball socket mount bases require basic hand tools for installation of you NBS telescopic mast, suitable for stop-and-go RF monitoring or temporary communication requirements such as emergency services response.

Specifications

Construction	Fully galvanised steel with 'slide-in' extension base, gusset reinforcements and socket sleeve, dual securing bolts and base section stop										
SKU	<table border="0"> <tr> <td>NBS-45TBMount</td> <td>Suits 45mm O.D. base</td> </tr> <tr> <td>NBS-50TBMount</td> <td>Suits 50mm O.D. base</td> </tr> <tr> <td>NBS-55TBMount</td> <td>Suits 55mm O.D. base</td> </tr> <tr> <td>NBS-61TBMount</td> <td>Suits 61mm O.D. base</td> </tr> <tr> <td>NBS-68TBMount</td> <td>Suits 68mm O.D. base</td> </tr> </table>	NBS-45TBMount	Suits 45mm O.D. base	NBS-50TBMount	Suits 50mm O.D. base	NBS-55TBMount	Suits 55mm O.D. base	NBS-61TBMount	Suits 61mm O.D. base	NBS-68TBMount	Suits 68mm O.D. base
NBS-45TBMount	Suits 45mm O.D. base										
NBS-50TBMount	Suits 50mm O.D. base										
NBS-55TBMount	Suits 55mm O.D. base										
NBS-61TBMount	Suits 61mm O.D. base										
NBS-68TBMount	Suits 68mm O.D. base										
Suitable Masts	Suits all NBS-2 / NBS-3 series telescopic masts - <i>as per suitable base section diameter</i>										
Weight	4.5 - 5.4kg - <i>depending on model</i>										
Dimensions	Overall height: 460mm SHS Extension length: 640mm SHS extension: 50mm x 50mm x 4mm W.T.										
Installation hardware	2 x securing bolts supplied in unit for clamping telescopic mast in socket										
Installation tools required	1 x adjustable spanner / 17mm spanner for securing telescopic mast in socket										
Installation Accessories required	1 or 2 guy wire supports per section for under 6 metre extended masts 3-4 guy supports for over 6m extended masts										
Installation	Remove your vehicles tow ball and insert the SHS extension bar into your tow ball socket. Secure using the supplied locking pin and split pin. Remove for transit										