Section 2: Telescopic Mast







NBS-3614


4-section anodised aluminium telescopic mast

61mm O.D. base

2.955 metres - Packed

10.76 metres - Extended



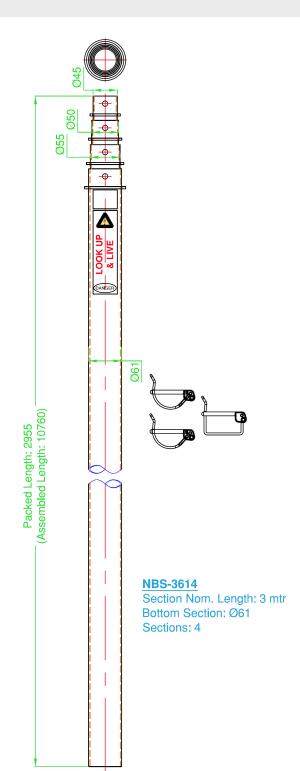

Specifications	
Construction	Clear anodised aluminium telescopic sections with section stop guides and 2 x passivated D-locking clip
Number of Sections	4
Retracted Height	2.955 metres / 9.69 ft
Extended Height	10.76 metres / 35.30 ft
Weight - excl. D-clips	9.0 kg / 19.84 lbs
Wind Load rating - Max.	160 kph / 99mph - with each section guy wire supported
Top section load rating	5.0 kg / 11.02 lbs
Max. surface area	0.2m²
Base Section Dimension	O.D: 61mm / 2.40"
2nd Section Dimensions	O.D: 55mm / 2.16"
3rd Section Dimensions	O.D: 50mm / 1.96"
4th Section Dimensions	O.D: 45mm / 1.77"
Supplied Accessories	3 x gold passivated section D-clips

Required Accessories - order quantity separately to suit 3/4 configuration		
Guy Wire - High strength nylon Single units, order by quantity required either 3 or 4 at each section For stainless steel see NBS-GW series	NBS-GR5 - 5 metre guy wire for base section NBS-GR10 - 10 metre guy wire for 2nd section	
	NBS-GR15 - 15 metre guy wire for top 2 sections	
Anodised Aluminium Guy Rings - free rotating single unit required - per mast	NBS-AGR62 - Suits 61mm O.D. bottom section NBS-AGR56 - Suits 55mm O.D. 2nd section NBS-AGR51 - Suits 50mm O.D. 3rd section NBS-AGR46 - Suits 45mm O.D. 4th section	

Optional Accessories - order separately to suit configuration	
Mount Bases	NBS-61WStand - drive-on/underwheel static stand NBS-61TWStand - drive-on/underwheel tilt stand NBS-61TBMount - tow-bar socket mount NBS-BS61 - static flat roof/ground stand
Antenna/Equirement mounts	1.3m top accessory mount tube 50mm O.D., includes 'D' locking clip - Enquire Directly for SKU