


NBS-2686

6-section anodised aluminium telescopic mast

68mm O.D. base

2.0 metres - Packed

10.38 metres - Extended

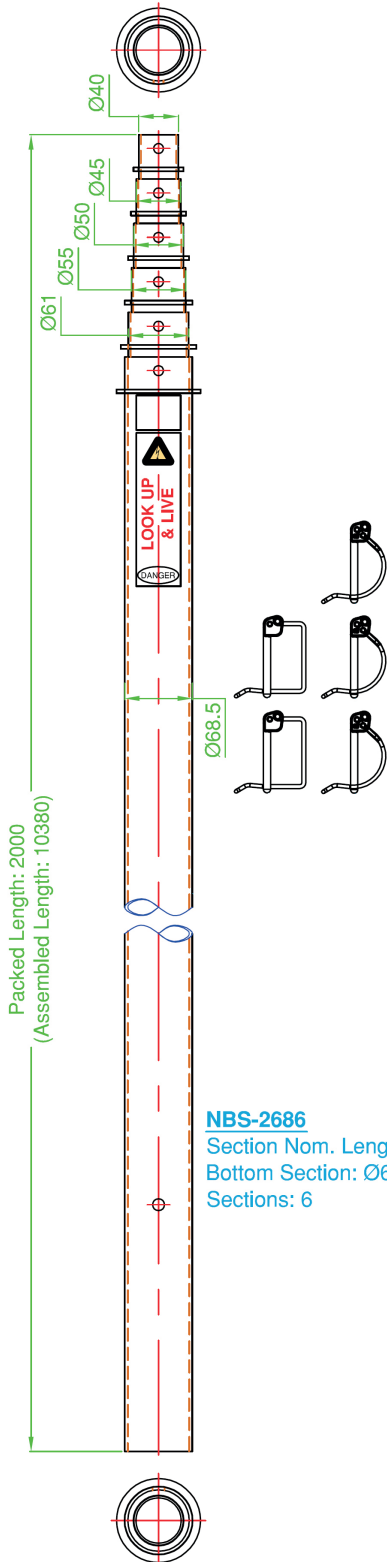

Specifications

| | |
|-------------------------|---|
| Construction | Clear anodised aluminium telescopic sections with section stop guides and 5 x passivated D-locking clip |
| Number of Sections | 6 |
| Retracted Height | 2.0 metres / 6.56 ft |
| Extended Height | 10.38 metres / 34.06 ft |
| Weight - excl. D-clips | 11.0 kg / 24.25 lbs |
| Wind Load rating - Max. | 160 kph / 99mph - with each section guy wire supported |
| Top section load rating | 10.0 kg / 22.05 lbs |
| Max. surface area | 0.2m ² |
| Base Section Dimension | O.D: 68mm / 2.67" |
| 2nd Section Dimensions | O.D: 61mm / 2.40" |
| 3rd Section Dimensions | O.D: 55mm / 2.16" |
| 4th Section Dimensions | O.D: 50mm / 1.96" |
| 5th Section Dimensions | O.D: 45mm / 1.77" |
| 6th Section Dimensions | O.D: 40mm / 1.57" |
| Supplied Accessories | 5 x gold passivated section D-clips |

Required Accessories - order quantity separately to suit 3/4 configuration

| | |
|---|---|
| Guy Wire - High strength nylon <i>Single units, order by quantity required either 3 or 4 at each section For stainless steel see NBS-GW series</i> | NBS-GR10 - 10 metre guy wire for 1st-3rd sections NBS-GR15 - 15 metre guy wire for 4-5th sections NBS-GR20 - 20 metre guy wire for 6th section |
| Anodised Aluminium Guy Rings - free rotating <i>single unit required - per mast</i> | NBS-AGR69 - Suits 68mm O.D. base section NBS-AGR62 - Suits 61mm O.D. 2nd section NBS-AGR56 - Suits 55mm O.D. 3rd section NBS-AGR51 - Suits 50mm O.D. 4th section NBS-AGR46 - Suits 45mm O.D. 5th section NBS-AGR41 - Suits 40mm O.D. 6th section |

Optional Accessories - order separately to suit configuration

| | |
|--------------------------|---|
| Mount Bases | NBS-68WStand - drive-on/underwheel static stand NBS-68TWStand - drive-on/underwheel tilt stand NBS-68TBMount - tow-bar socket mount NBS-BS68 - static flat roof/ground stand |
| Antenna/Equipment mounts | NBS-MT35 - 1.5m top accessory mount tube 35.5mm O.D., includes 'D' locking clip |
| Turnbuckles | NBS-9640-2 - 8mm 316 stainless steel (toggle & toggle) turnbuckle |