


NBS-3684

4-section anodised aluminium telescopic mast

68mm O.D. base 2.91 metres - retracted 10.58 metres - extended

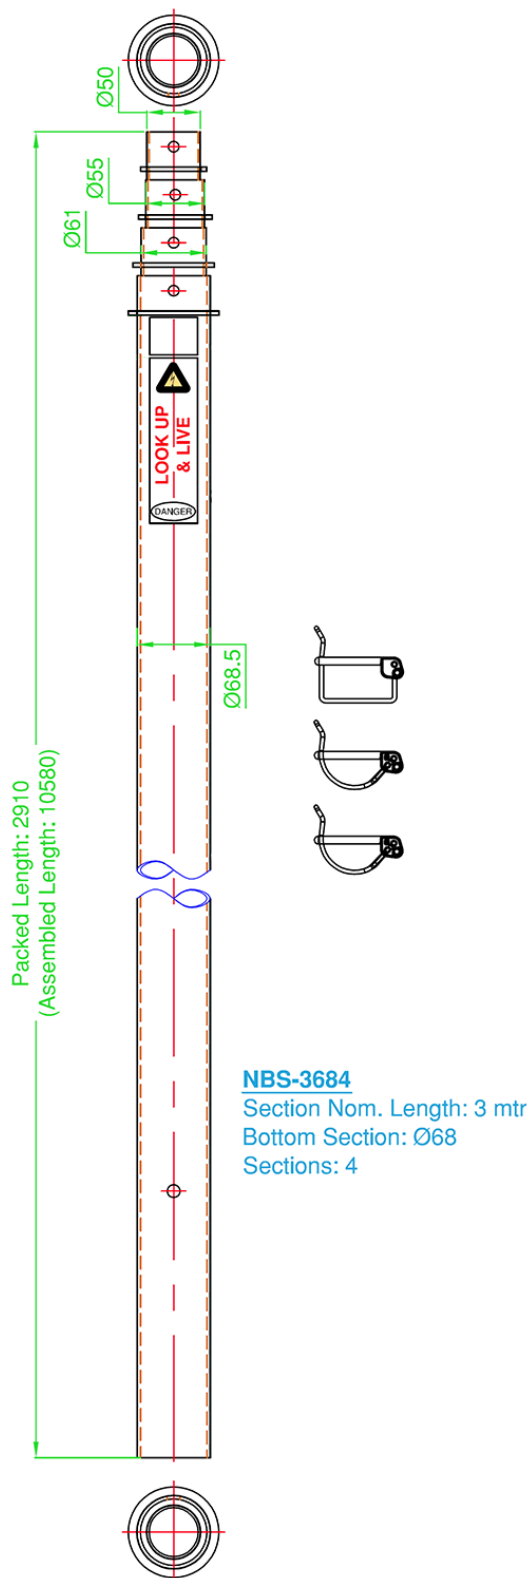

Specifications

Construction	Anodised aluminium telescopic sections with section stop guides and passivated 'D' locking clips
Number of Sections	4
Retracted Height	2.91 metres / 9.54 ft
Extended Height	10.58 metres / 34.71 ft
Weight - excl D-clips	12.0 kg / 26.46 lbs
Wind Load rating - Max.	160 kph / 99mph - <i>with each section guy wire supported</i>
Top section load rating	5.5kg / 12 lbs
Max. surface area	0.25m ²
Base Section Dimension	O.D: 68mm / 2.68"
2nd Section Dimension	O.D: 61mm / 2.40"
3rd Section Dimension	O.D: 55mm / 2.16"
Top Section Dimension	O.D: 50mm / 1.97"
Supplied Accessories	3 x 'D' locking clip for extended section locking - 1 x <i>square edge</i> for base section

Required Accessories - order quantity separately to suit 3/4 configuration

Guy Wire - High strength nylon <i>Single units, order by quantity required either 3 or 4, set at every 2nd section For stainless steel see NBS-GW series</i>	NBS-GR5 - 5 metre guy wire for base section NBS-GR10 - 10 metre guy wire for 2nd section NBS-GR15 - 15 metre guy wire for 3rd and top sections
Anodised Aluminium Guy Rings - free rotating <i>single unit required - per mast</i>	NBS-AGR69 - Suits 68mm O.D. bottom section NBS-AGR62 - Suits 61mm O.D. 2nd bottom section NBS-AGR56 - Suits 55mm O.D. 2nd top section NBS-AGR51 - Suits 50mm O.D. top section

Optional Accessories - order separately to suit configuration

Mount Bases	NBS-68WStand - drive-on/underwheel static stand NBS-68TWStand - drive-on/underwheel tilt stand NBS-68TBMount - tow-bar socket mount NBS-BS68 - static flat roof/ground stand
Base Extensions	NBS-4761-MK - 4 metre x 76mm O.D. base extension kit with guy ring and flat ground/flat roof mount base
Antenna/Equipment mounts	1.3m top accessory mount tube 45mm O.D., includes 'D' locking clip - <u>Enquire Directly for SKU</u>