




# NBS-3685

5-section anodised aluminium telescopic mast

68mm O.D. base

2.955 metres - Packed

13.27 metres - Extended

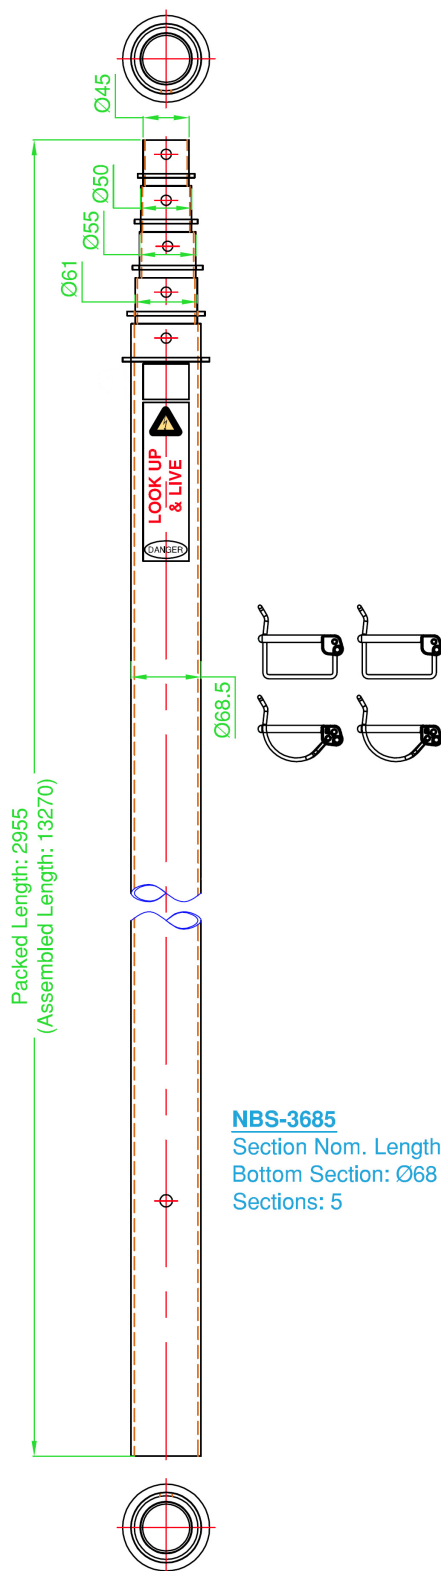

## NBS-3685

Section Nom. Length: 3 mtr

Bottom Section: Ø68

Sections: 5

## Specifications

|                         |   |
|-------------------------|---|
| Construction            | Clear anodised aluminium telescopic sections with section stop guides and 4 x passivated D-locking clip |
| Number of Sections      | 5   |
| Retracted Height        | 2.955 metres / 9.67 ft  |
| Extended Height         | 13.27 metres / 43.54 ft   |
| Weight - excl. D-clips  | 14.0 kg / 30.86 lbs   |
| Wind Load rating - Max. | 160 kph / 99mph - with each section guy wire supported  |
| Top section load rating | 6.5 kg / 14.33 lbs  |
| Max. surface area       | 0.2m <sup>2</sup>   |
| Base Section Dimension  | O.D: 68mm / 2.67"   |
| 2nd Section Dimensions  | O.D: 61mm / 2.40"   |
| 3rd Section Dimensions  | O.D: 55mm / 2.16"   |
| 4th Section Dimensions  | O.D: 50mm / 1.96"   |
| 5th Section Dimensions  | O.D: 45mm / 1.77"   |
| Supplied Accessories    | 4 x gold passivated section D-clips   |

## Required Accessories - order quantity separately to suit 3/4 configuration

|   |  |
|---|--|
| Guy Wire - High strength nylon<br><i>Single units, order by quantity required either 3 or 4 at each section<br/>For stainless steel see NBS-GW series</i> | NBS-GR10 - 10 metre guy wire for 1-3 sections<br>NBS-GR15 - 15 metre guy wire for 4th section<br>NBS-GR20 - 20 metre guy wire for top section  |
| Anodised Aluminium Guy<br>Rings - free rotating<br><i>single unit required - per mast</i>   | NBS-AGR69 - Suits 68mm O.D. base section<br>NBS-AGR62 - Suits 61mm O.D. 2nd section<br>NBS-AGR56 - Suits 55mm O.D. 3rd section<br>NBS-AGR51 - Suits 50mm O.D. 4th section<br>NBS-AGR46 - Suits 45mm O.D. 5th section |

## Optional Accessories - order separately to suit configuration

|                          |   |
|--------------------------|---|
| Mount Bases              | NBS-68WStand - drive-on/underwheel static stand<br>NBS-68TWStand - drive-on/underwheel tilt stand<br>NBS-68TBMount - tow-bar socket mount<br>NBS-BS68 - static flat roof/ground stand |
| Base Extensions          | NBS-4761-MK - 4 metre x 76mm O.D. base extension kit with guy ring and flat ground/flat roof mount base   |
| Antenna/Equipment mounts | 1.3m top accessory mount tube 45mm O.D., includes 'D' locking clip - <u>Enquire Directly for SKU</u>  |